



# NEW PVC FITTING

with sockets  
on every  
free end

[www.pestan.net](http://www.pestan.net)





PIPING  
SOLUTIONS

 **PEŠTAN**  
we build trust



## PVC FITTING FF

- Connection with pipes are achieved through the socket on every end of fitting (FF)
- Sealing rings made of TPE (Thermoplastic elastomer-Thermoplastic rubber) are already inserted in sockets
- TPE which is located in socket has two sealing surface and an additional plastic ring that is made in a different color.
- Maximum usage of piping material (shortened pipes are easily connected with a fitting-do not need an additional fitting)
- SRPS EN 1401

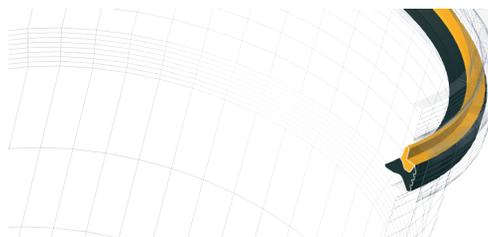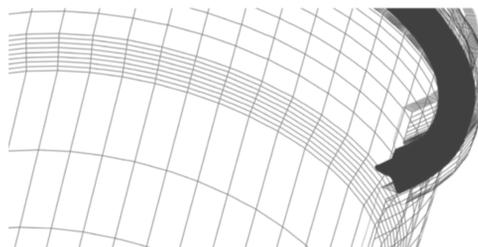

### ELBOW 45°

ELBOW  $\varnothing 110/45^\circ$  PVC  
 ELBOW  $\varnothing 125/45^\circ$  PVC  
 ELBOW  $\varnothing 160/45^\circ$  PVC

### ELBOW 90°

ELBOW  $\varnothing 110/87.5^\circ$  PVC  
 ELBOW  $\varnothing 125/87.5^\circ$  PVC  
 ELBOW  $\varnothing 160/87.5^\circ$  PVC

### BRANCH 45°

BRANCH  $\varnothing 110/\varnothing 110/45^\circ$  PVC  
 BRANCH  $\varnothing 125/\varnothing 125/45^\circ$  PVC  
 BRANCH  $\varnothing 125/\varnothing 110/45^\circ$  PVC  
 BRANCH  $\varnothing 160/\varnothing 160/45^\circ$  PVC  
 BRANCH  $\varnothing 160/\varnothing 125/45^\circ$  PVC  
 BRANCH  $\varnothing 160/\varnothing 110/45^\circ$  PVC

### BRANCH 90°

BRANCH  $\varnothing 110/\varnothing 110/87.5^\circ$  PVC  
 BRANCH  $\varnothing 125/\varnothing 125/87.5^\circ$  PVC  
 BRANCH  $\varnothing 125/\varnothing 110/87.5^\circ$  PVC  
 BRANCH  $\varnothing 160/\varnothing 160/87.5^\circ$  PVC  
 BRANCH  $\varnothing 160/\varnothing 125/87.5^\circ$  PVC  
 BRANCH  $\varnothing 160/\varnothing 110/87.5^\circ$  PVC